



## Industrial Ethernet Switches

**IES3010-2F-2GS**

- ◆ 6-port 10/100M Ethernet+2-port 100Base-FX+2-port gigabit(SFP slot) Managed Switch

### ➤ Features

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W
- MW-Ring ring network patent technology (Fault recovery time<20ms )
- Support RSTP, way exchange time<1s
- Support WEB configuration
- Support MAC address learning, aging automatic
- Support port status display, data update.
- Support static and dynamic IGMP
- Support flow statistics
- Support bi-directional port mirroring
- Support rate control, Broadcast storm control
- Support configuration file up and download
- Support 1 channel relay alarm output
- Industrial grade 4 design, -25-70℃ work temperature
- No fan design
- IP40 protection grade



### ➤ Introduction

IES3010-2F-2GS is a industrial grade, managed and redundancy Ethernet switch. It provided some kinds of advanced network managed function, like as: MW-Ring redundancy ring network, VLAN, Trunking, Quality of Service, Speed control, port mirroring, fault alarm and firmware upgrade online.

MW-Ring can bring your Ethernet to intelligent redundancy. Standard Industry design, can satisfied every requirement of the industry scene. All components used industry grade, it takes products high reliability. It provided wide voltage power supply input.

MW-Ring™ is designed as a rapid redundancy network arithmetics . It provided recover technology for fault of rapid redundant network, the recovery time<20ms.

### ➤ Application

- Intelligent Transportation System
- Connection of Sub-network for Surveillance Center
- Power system applications
- High Way & Toll Station Surveillance
- Transformer Substation Communication System
- Oil of GPRS data acquisition system



## ➤ Specification

| <b>Technology</b>                        |  |
|--|--|
| Standard                                 | Support IEEE802.3, IEEE802.3u, IEEE 802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W   |
| Protocol                                 | ARP, ICMP, TCP, UDP, DHCP, DNS, HTTP, Telnet,, MW-Ring, RSTP, SNMP   |
| Flow control                             | IEEE802.3x flow control, back press flow control   |
| <b>Function</b>                          |  |
| Switch function                          | MW-Ring, QOS, 802.1QVLAN, RSTP, SNMP, Port trunking, static multicast filter, port mirroring, bandwidth management, broadcast storm control, port flow statistics, access system |
| MW-Ring                                  | Support Single, Couple, Chain, Dual homing   |
| Exchange attribute                       |  |
| 100M forward speed                       | 148810pps  |
| 1000M forward speed                      | 1488100pps   |
| 100M maximum filter speed                | 148810pps  |
| 1000M maximum filter speed               | 1488100pps   |
| Transmit mode                            | store and forward  |
| System exchange bandwidth                | 5.6G   |
| MAC address table                        | 8K   |
| Memory                                   | 1M   |
| <b>Interface</b>                         |  |
| Electric port                            | 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect   |
| 100M optic fiber port                    | 100Base-FX, SC/ST connector, support single mode (20/40/60/80Km optional), multi mode(2Km), wavelength: 1310nm, 1550nm   |
| 1000M fiber port                         | 1000Base-FX ( SFP port)  |
| Console port                             | debug serial port carry out CLI command  |
| Alarm port                               | 2bit 7.62mmTerminal block,1 channel relay alarm output   |
| Load ability                             | 1A@24VDC   |
| Transfer distance                        |  |
| Twisted cable                            | 100M ( standard CAT5/CAT5e cable)  |
| Multimode                                | 1310nm, 2Km  |
| Single mode                              | 1310nm, 20/40/60Km,1550nm, 60/80/100/120Km   |
| LED indicator                            |  |
| Run indicator                            | Run  |
| Interface indicator                      | Link(1~8/G1~G2)  |
| Power supply indicator                   | PWR1, PWR2   |
| Alarm indicator                          | Alarm  |
| <b>Power supply</b>                      |  |
| Input voltage                            | 12~48VDC   |
| Input method                             | 4 bits 7.62mm terminal block   |
| Overload current protect                 | 4.0A(DC) or 5.0A(AC)   |
| Support DC dual power supply alarm input |  |

Support DC dual power supply redundancy

Support DC input no parity, protection  
reverse connection

Consumption

Unload consumption 5.1W@24VDC

Full load consumption 8.0W@24VDC

Working environment

Working temperature -25~70°C

Storage temperature -40~85°C

Relative Humidity 5%~95% (no condensation)

Mechanical Structure

Shell IP40 protect grade, metal shell

Installation DIN rail and wall mount

Size(W×H×D) 138mm×53mm×110mm

Weight 720g

Industry Standard CE, FCC, RoHS, PAL, UL508(Pending)

EMI: FCC Part 15, CISPR (EN55022) class A

EMS EN61000-4-2 (ESD), Level 4

EN61000-4-3 (RS), Level 3

EN61000-4-4 (EFT), Level 4

EN61000-4-5 (Surge), Level 4 (AC power supply)

EN61000-4-6 (CS), Level 3

EN61000-4-8, Level 5


Shock IEC 60068-2-27

Free fall IEC 60068-2-32

Shake IEC 60068-2-6

Warranty 5 years

## ➤ Dimension

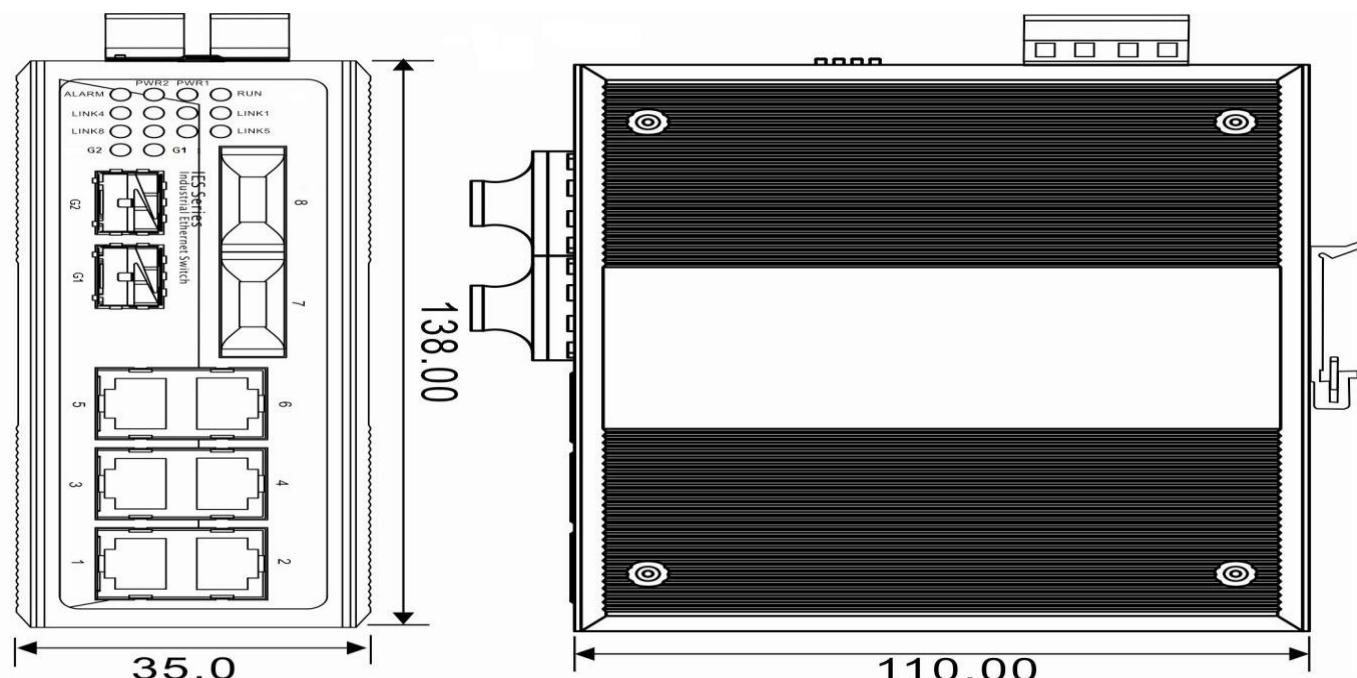

## ➤ Ordering Information

| Model NO.          | Description  |
|--------------------|--|
| IES3010-2F-2GS(M)  | 6 port 10/100Base-T(X)+2 port 100Base-FX Multi-mode SC/ST+ 2 port gigabit (SFP slot),12-48VDC                |
| IES3010-2F-2GS(S)  | 6 port 10/100Base-T(X)+2 port 100Base-FX Single-mode SC/ST+2 port gigabit (SFP slot),12-48VDC                |
| IES3010-2F-2GS(SS) | 6 port 10/100Base-T(X)+2 port 100Base-FX single-mode, single fiber SC/ST+ 2 port gigabit (SFP slot),12-48VDC |

## ➤ Packing List

- Industrial Ethernet switch IES3010-2F-2GS (plus terminal block) ×1
- Hardware Installation Guide ×1
- CD-ROM with Windows Utility ×1
- Product Warranty Statement ×1
- RJ45 to DB9 Console port cable ×1
- DIN-Rail setting fittings (wall mounting for optional)